


CANUN INTERNATIONAL

OPERATING INSTRUCTIONS FOR CANPUSH51 SCREEN PUSHER

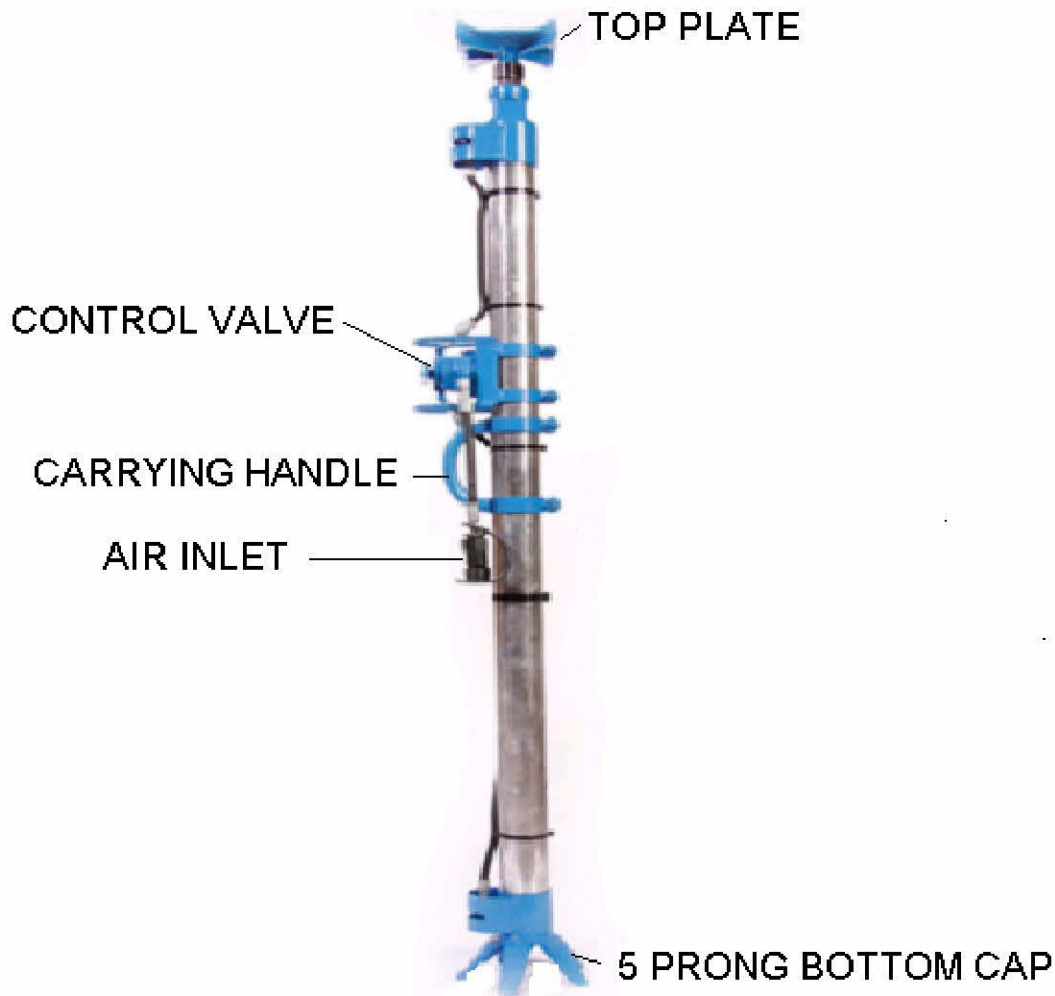

- 1) Connect airline to air inlet. Screen Pusher is supplied with a 1" straight thread fitting complete with air inlet screen to filter air supply.
- 2) Position Screen Pusher in desired position using carrying handle. Make sure bottom cap is sitting on secure surface.
- 3) Turn control valve clockwise to extend rod until top plate pushes against screen.
- 4) Put valve in neutral position and check to make sure that leg will not slip.
- 5) Turn valve to the on position for a continuous supply of air pressure to hold screen tightly to the rock face.
- 6) Install rock bolt using CANUN Stoper or Jackleg while leg is holding screen in position.
- 7) When bolting is complete turn valve counterclockwise to retract top plate.
- 8) Reposition leg and repeat from item 2.